International
IOR Rectifier

PD - 9.1470E

PRELIMINARY

IRG4PC50U

INSULATED GATE BIPOLAR TRANSISTOR

UltraFast Speed IGBT

Features

- UltraFast: Optimized for high operating frequencies 8-40 kHz in hard switching, >200 kHz in resonant mode
- Generation 4 IGBT design provides tighter parameter distribution and higher efficiency than Generation 3
- Industry standard TO-247AC package



n-channel

$V_{CES} = 600V$

$V_{CE(on)\ typ.} = 1.65V$

$@V_{GE} = 15V, I_C = 27A$

Benefits

- Generation 4 IGBT's offer highest efficiency available
- IGBT's optimized for specified application conditions
- Designed to be a "drop-in" replacement for equivalent industry-standard Generation 3 IR IGBT's



TO-247AC

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{CES}	Collector-to-Emitter Breakdown Voltage	600	V
I_C @ T_C = 25°C	Continuous Collector Current	55	A
I_C @ T_C = 100°C	Continuous Collector Current	27	
I_{CM}	Pulsed Collector Current ①	220	
I_{LM}	Clamped Inductive Load Current ②	220	
V_{GE}	Gate-to-Emitter Voltage	± 20	V
E_{ARV}	Reverse Voltage Avalanche Energy ③	20	mJ
P_D @ T_C = 25°C	Maximum Power Dissipation	200	W
P_D @ T_C = 100°C	Maximum Power Dissipation	78	
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to + 150	°C
	Soldering Temperature, for 10 seconds	300 (0.063 in. (1.6mm from case)	
	Mounting torque, 6-32 or M3 screw.	10 lbf•in (1.1N•m)	

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	----	0.64	°C/W
$R_{\theta CS}$	Case-to-Sink, Flat, Greased Surface	0.24	----	
$R_{\theta JA}$	Junction-to-Ambient, typical socket mount	----	40	
Wt	Weight	6 (0.21)	----	g (oz)

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions	
$V_{(BR)CES}$	Collector-to-Emitter Breakdown Voltage	600	----	----	V	V_{GE} = 0V, I_C = 250µA	
$V_{(BR)ECS}$	Emitter-to-Collector Breakdown Voltage ④	18	----	----	V	V_{GE} = 0V, I_C = 1.0A	
$\Delta V_{(BR)CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage	----	0.60	----	V/°C	V_{GE} = 0V, I_C = 1.0mA	
$V_{CE(ON)}$	Collector-to-Emitter Saturation Voltage	----	1.65	2.0	V	I_C = 27A	V_{GE} = 15V
		----	2.0	----		I_C = 55A	See Fig.2, 5
		----	1.6	----		I_C = 27A , T_J = 150°C	
$V_{GE(th)}$	Gate Threshold Voltage	3.0	----	6.0		V_{CE} = V_{GE}, I_C = 250µA	
$\Delta V_{GE(th)}/\Delta T_J$	Temperature Coeff. of Threshold Voltage	----	-13	----	mV/°C	V_{CE} = V_{GE}, I_C = 250µA	
g_{fe}	Forward Transconductance ⑤	16	24	----	S	V_{CE} ≥ 15V, I_C = 27A	
I_{CES}	Zero Gate Voltage Collector Current	----	----	250	µA	V_{GE} = 0V, V_{CE} = 600V	
		----	----	2.0		V_{GE} = 0V, V_{CE} = 10V, T_J = 25°C	
		----	----	5000		V_{GE} = 0V, V_{CE} = 600V, T_J = 150°C	
I_{GES}	Gate-to-Emitter Leakage Current	----	----	±100	nA	V_{GE} = ±20V	

Switching Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions	
Q_g	Total Gate Charge (turn-on)	----	180	270	nC	I_C = 27A	
Q_{ge}	Gate - Emitter Charge (turn-on)	----	25	38		V_{CC} = 400V	See Fig. 8
Q_{gc}	Gate - Collector Charge (turn-on)	----	61	90		V_{GE} = 15V	
$t_{d(on)}$	Turn-On Delay Time	----	32	----	ns		
t_r	Rise Time	----	20	----		T_J = 25°C	
$t_{d(off)}$	Turn-Off Delay Time	----	170	260		I_C = 27A, V_{CC} = 480V	
t_f	Fall Time	----	88	130		V_{GE} = 15V, R_G = 5.0Ω	
E_{on}	Turn-On Switching Loss	----	0.12	----	mJ	Energy losses include "tail"	
E_{off}	Turn-Off Switching Loss	----	0.54	----		See Fig. 10, 11, 13, 14	
E_{ts}	Total Switching Loss	----	0.66	0.9			
$t_{d(on)}$	Turn-On Delay Time	----	31	----	ns	T_J = 150°C,	
t_r	Rise Time	----	23	----		I_C = 27A, V_{CC} = 480V	
$t_{d(off)}$	Turn-Off Delay Time	----	230	----		V_{GE} = 15V, R_G = 5.0Ω	
t_f	Fall Time	----	120	----		Energy losses include "tail"	
E_{ts}	Total Switching Loss	----	1.6	----	mJ	See Fig. 13, 14	
L_E	Internal Emitter Inductance	----	13	----	nH	Measured 5mm from package	
C_{ies}	Input Capacitance	----	4000	----	pF	V_{GE} = 0V	
C_{oes}	Output Capacitance	----	250	----		V_{CC} = 30V	See Fig. 7
C_{res}	Reverse Transfer Capacitance	----	52	----		f = 1.0MHz	

Notes:

① Repetitive rating; V_{GE} = 20V, pulse width limited by max. junction temperature. (See fig. 13b)

② V_{CC} = 80%(V_{CES}), V_{GE} = 20V, L = 10µH, R_G = 5.0Ω, (See fig. 13a)

③ Repetitive rating; pulse width limited by maximum junction temperature.

④ Pulse width ≤ 80µs; duty factor ≤ 0.1%.

⑤ Pulse width 5.0µs, single shot.

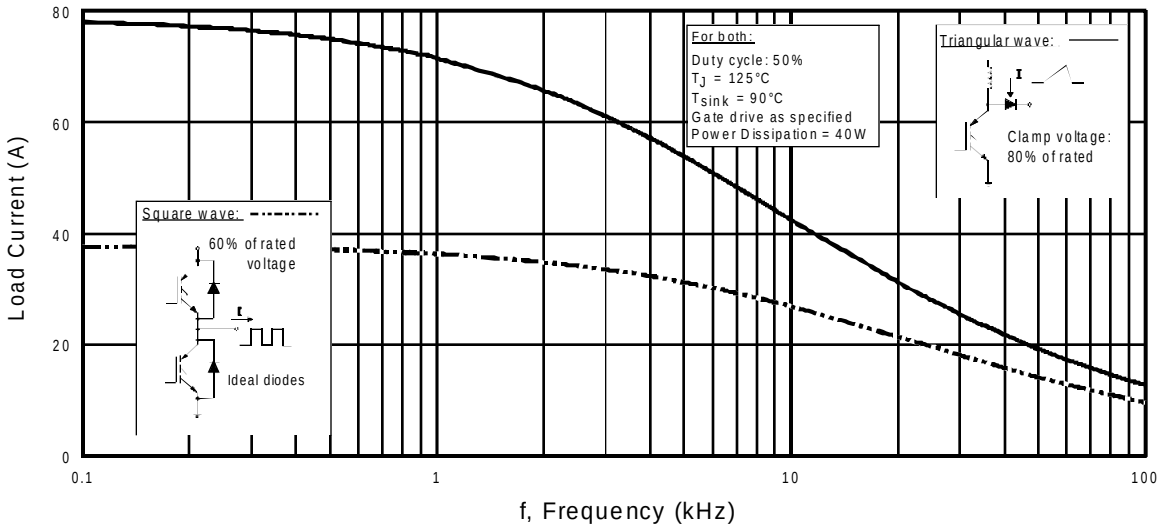

Fig. 1 - Typical Load Current vs. Frequency
(For square wave, $I=I_{RMS}$ of fundamental; for triangular wave, $I=I_{PK}$)

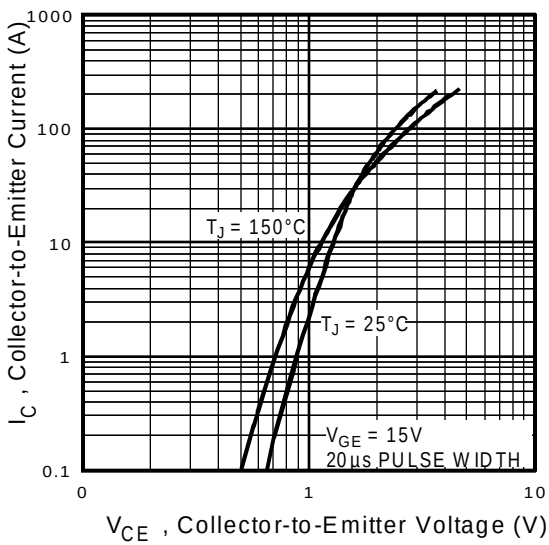

Fig. 2 - Typical Output Characteristics

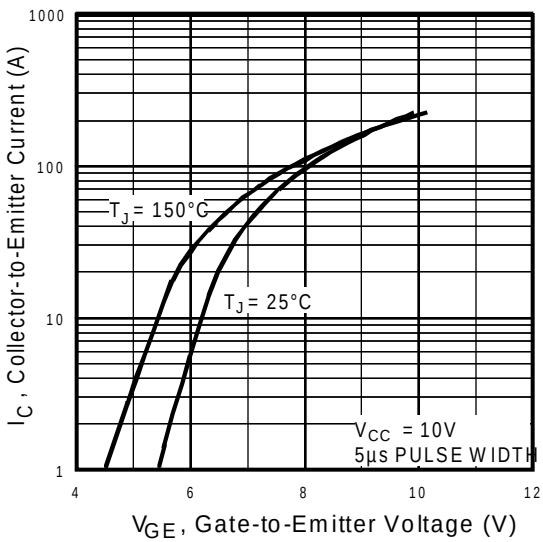

Fig. 3 - Typical Transfer Characteristics

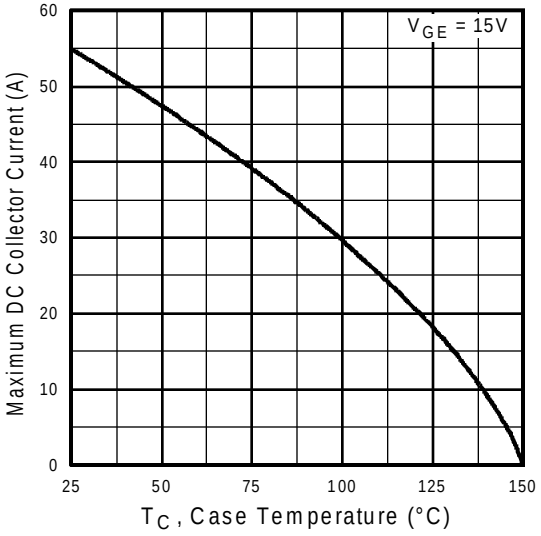

Fig. 4 - Maximum Collector Current vs. Case Temperature

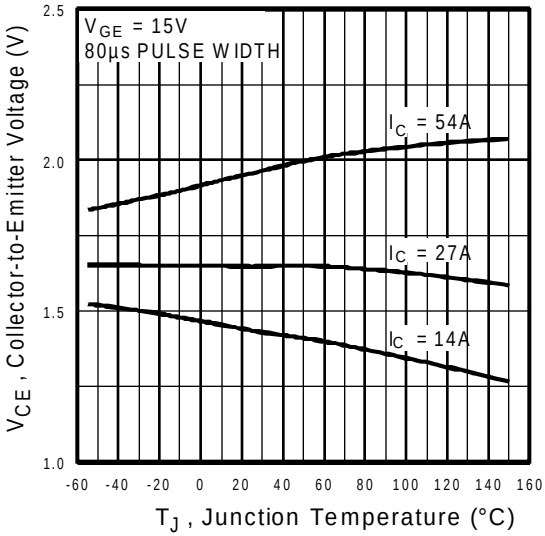

Fig. 5 - Collector-to-Emitter Voltage vs. Junction Temperature

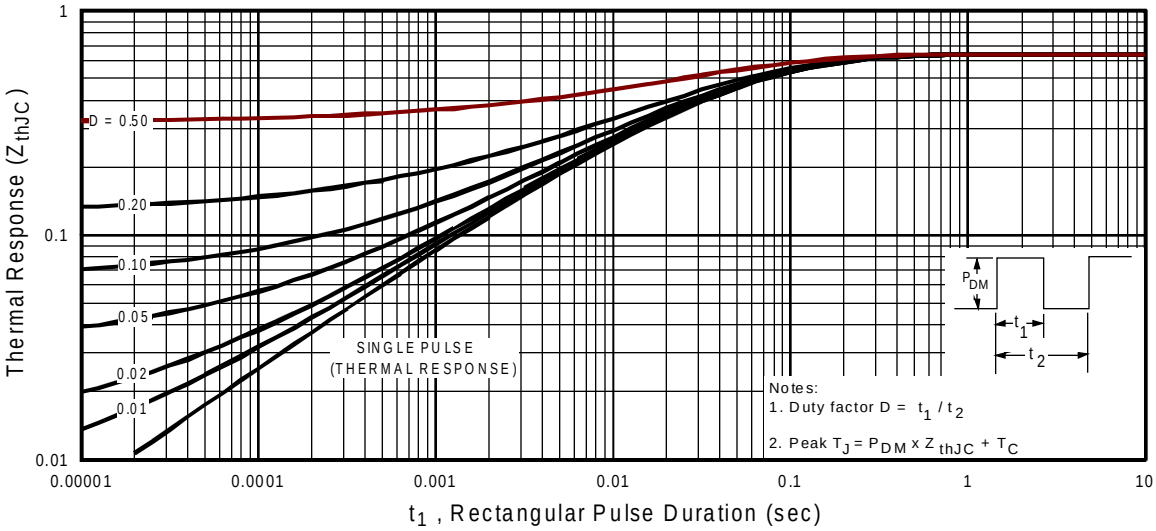

Fig. 6 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

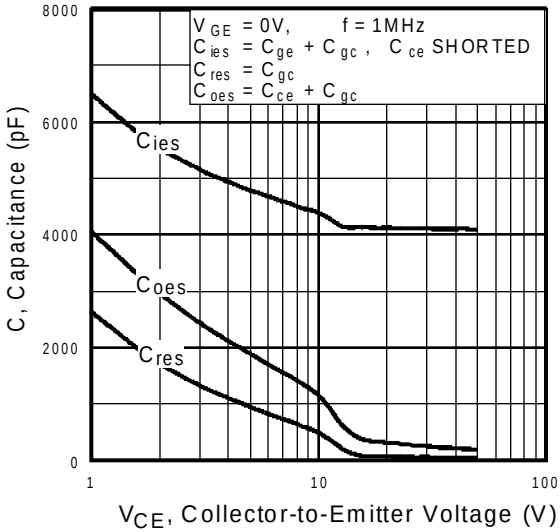

Fig. 7 - Typical Capacitance vs. Collector-to-Emitter Voltage

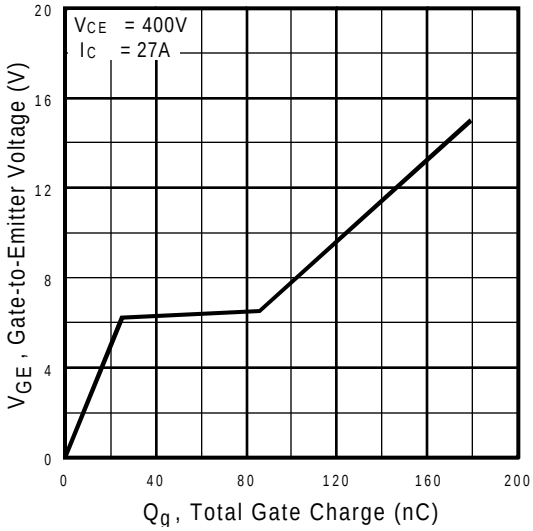

Fig. 8 - Typical Gate Charge vs. Gate-to-Emitter Voltage

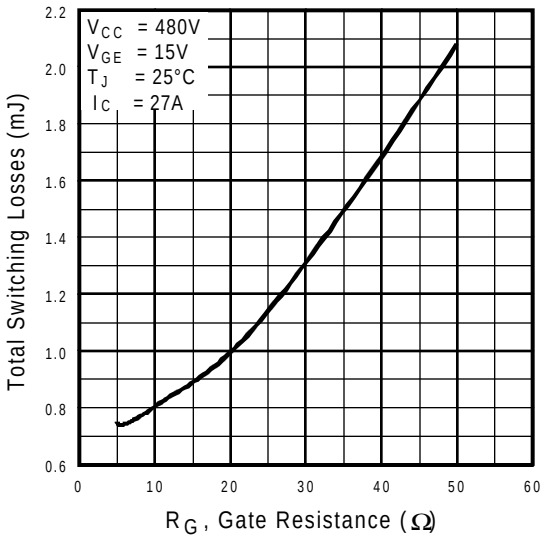

Fig. 9 - Typical Switching Losses vs. Gate Resistance

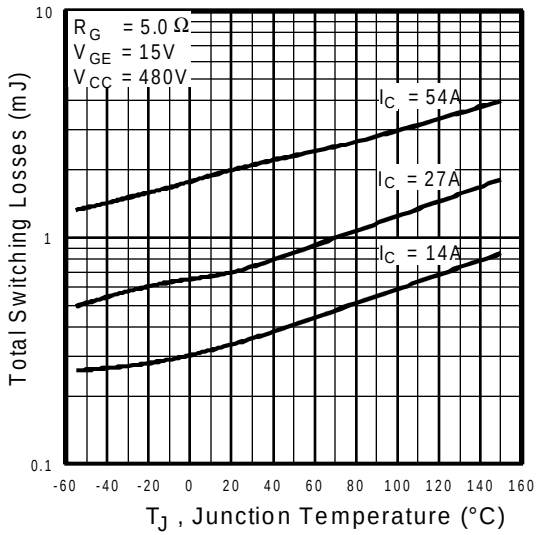

Fig. 10 - Typical Switching Losses vs. Junction Temperature

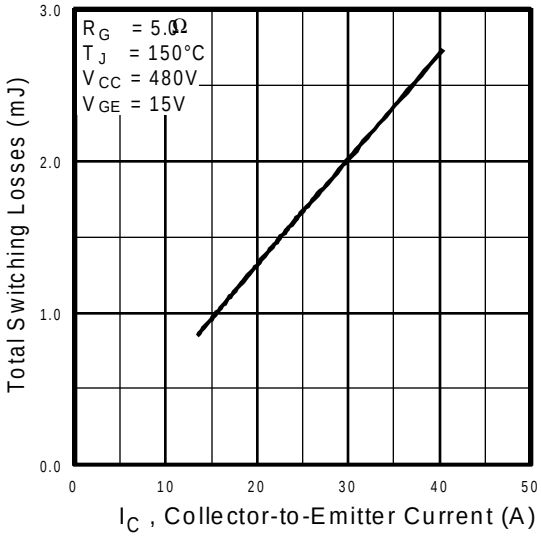

Fig. 11 - Typical Switching Losses vs. Collector-to-Emitter Current

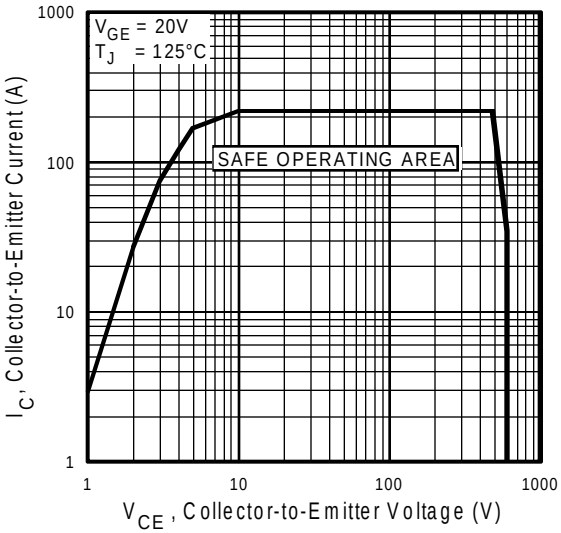

Fig. 12 - Turn-Off SOA

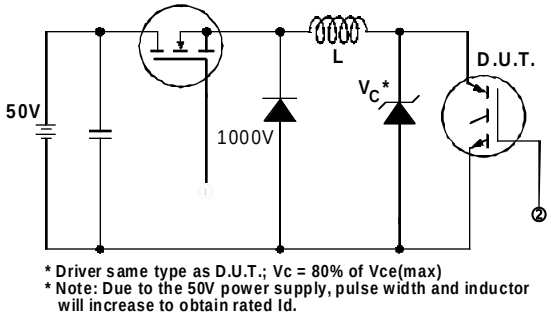

Fig. 13a - Clamped Inductive Load Test Circuit

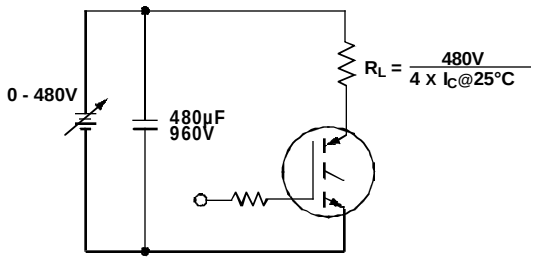

Fig. 13b - Pulsed Collector Current Test Circuit

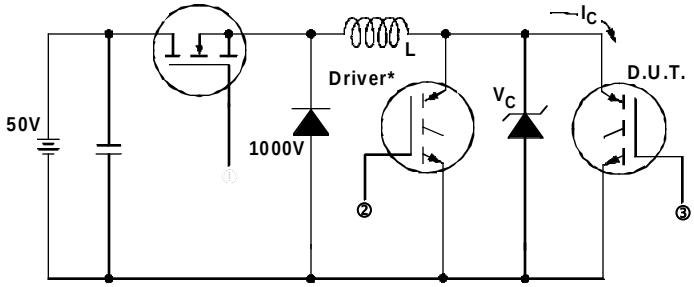

Fig. 14a - Switching Loss Test Circuit

*** Driver same type as D.U.T., VC = 480V**

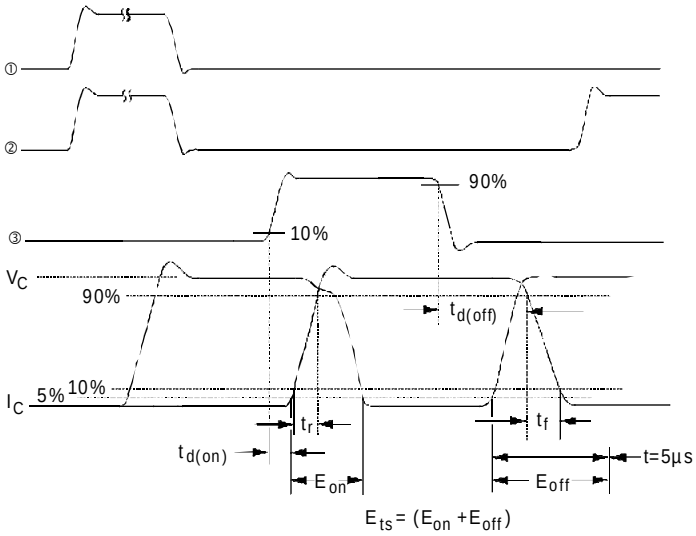

Fig. 14b - Switching Loss Waveforms

Case Outline and Dimensions — TO-247AC

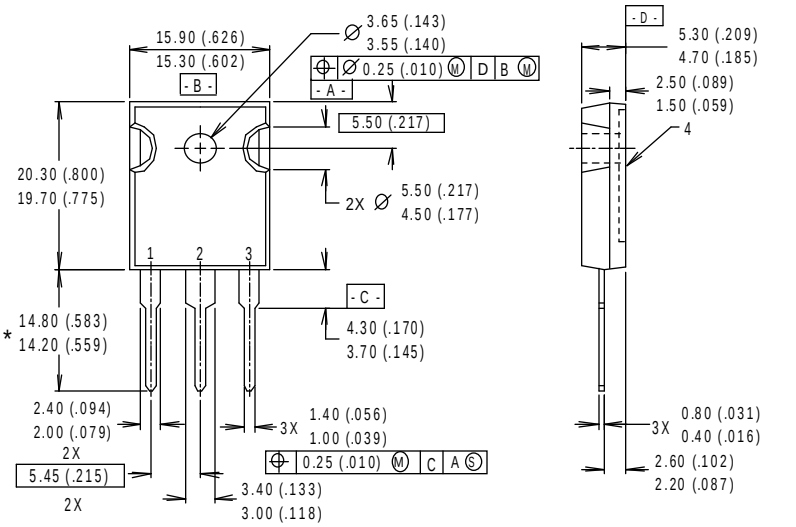

NOTES:
1 DIMENSIONS & TOLERANCING PER ANSI Y14.5M, 1982.
2 CONTROLLING DIMENSION : INCH.
3 DIMENSIONS ARE SHOWN MILLIMETERS (INCHES).
4 CONFORMS TO JEDEC OUTLINE TO-247AC.

LEAD ASSIGNMENTS
1 - GATE
2 - COLLECTOR
3 - EMITTER
4 - COLLECTOR

* LONGER LEADED (20mm) VERSION AVAILABLE (TO-247AD) TO ORDER ADD "-E" SUFFIX TO PART NUMBER

CONFORMS TO JEDEC OUTLINE TO-247AC (TO-3P)
Dimensions in Millimeters and (Inches)

International
IOR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, UK Tel: ++ 44 1883 732020
IR CANADA: 7321 Victoria Park Ave., Suite 201, Markham, Ontario L3R 2Z8, Tel: (905) 475 1897
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 451 0111
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo Japan 171 Tel: 81 3 3983 0086
IR SOUTHEAST ASIA: 315 Outram Road, #10-02 Tan Boon Liat Building, Singapore 0316 Tel: 65 221 8371
http://www.irf.com/ Data and specifications subject to change without notice. 4/97