

SCHOTTKY RECTIFIER

2 Amp

Major Ratings and Characteristics





Characteristics	20CJQ060	Units
$I_{F(AV)}$ Rectangular waveform	2.0	A
V_{RRM}	60	V
I_{FSM} @ $t_p = 5\mu s$ sine	385	A
V_F @ 1.0Apk, $T_J = 125^\circ C$ (per leg)	0.56	V
T_J	-55 to 150	$^\circ C$

Description / Features

The 20CJQ060 surface-mount Schottky rectifier has been designed for applications requiring very low forward drop and very small foot prints. Typical applications are in portables, switching power supplies, converters, automotive systems, free-wheeling diodes, battery charging and reverse battery protection.

- Small footprint, surface mountable
- Low profile
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long-term reliability
- Common Cathode

SOT-223

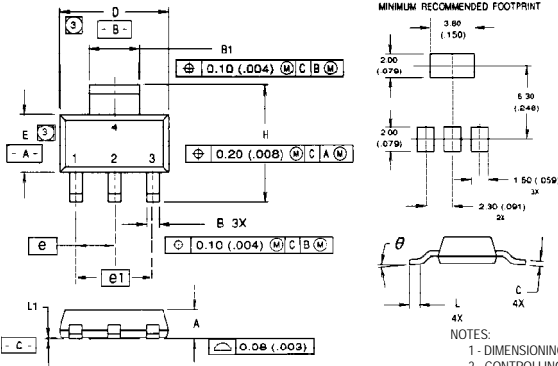CASE STYLE	CASE OUTLINE																																																																						
																																																																							
PART MARKING 	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2">DIM</th> <th colspan="2">MILLIMETERS</th> <th colspan="2">INCHES</th> </tr> <tr> <th>MIN</th> <th>MAX</th> <th>MIN</th> <th>MAX</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>1.55</td> <td>1.80</td> <td>.061</td> <td>.071</td> </tr> <tr> <td>B</td> <td>0.65</td> <td>0.85</td> <td>.026</td> <td>.033</td> </tr> <tr> <td>B1</td> <td>2.95</td> <td>3.15</td> <td>.116</td> <td>.124</td> </tr> <tr> <td>C</td> <td>0.25</td> <td>0.35</td> <td>.010</td> <td>.014</td> </tr> <tr> <td>D</td> <td>6.30</td> <td>6.70</td> <td>.248</td> <td>.264</td> </tr> <tr> <td>E</td> <td>3.30</td> <td>3.70</td> <td>.130</td> <td>.146</td> </tr> <tr> <td>e</td> <td>2.30</td> <td>BSC</td> <td>.0905</td> <td>BSC</td> </tr> <tr> <td>e1</td> <td>4.60</td> <td>BSC</td> <td>.181</td> <td>BSC</td> </tr> <tr> <td>H</td> <td>6.71</td> <td>7.29</td> <td>.267</td> <td>.287</td> </tr> <tr> <td>L</td> <td>—</td> <td>0.91</td> <td>—</td> <td>.036</td> </tr> <tr> <td>L1</td> <td>0.02</td> <td>0.10</td> <td>.0008</td> <td>.004</td> </tr> <tr> <td>θ</td> <td>—</td> <td>10⁰ MAX</td> <td>—</td> <td>10⁰ MAX</td> </tr> </tbody> </table> <p style="font-size: small; margin-top: 5px;"> NOTES: 1 - DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2 - CONTROLLING DIMENSION: INCH. 3 - DIMENSIONS DO NOT INCLUDE MOLD FLASH. (C) CONFORMS TO JEDEC OUTLINE TO-261AA. </p>		DIM	MILLIMETERS		INCHES		MIN	MAX	MIN	MAX	A	1.55	1.80	.061	.071	B	0.65	0.85	.026	.033	B1	2.95	3.15	.116	.124	C	0.25	0.35	.010	.014	D	6.30	6.70	.248	.264	E	3.30	3.70	.130	.146	e	2.30	BSC	.0905	BSC	e1	4.60	BSC	.181	BSC	H	6.71	7.29	.267	.287	L	—	0.91	—	.036	L1	0.02	0.10	.0008	.004	θ	—	10 ⁰ MAX	—	10 ⁰ MAX
DIM	MILLIMETERS			INCHES																																																																			
	MIN	MAX	MIN	MAX																																																																			
A	1.55	1.80	.061	.071																																																																			
B	0.65	0.85	.026	.033																																																																			
B1	2.95	3.15	.116	.124																																																																			
C	0.25	0.35	.010	.014																																																																			
D	6.30	6.70	.248	.264																																																																			
E	3.30	3.70	.130	.146																																																																			
e	2.30	BSC	.0905	BSC																																																																			
e1	4.60	BSC	.181	BSC																																																																			
H	6.71	7.29	.267	.287																																																																			
L	—	0.91	—	.036																																																																			
L1	0.02	0.10	.0008	.004																																																																			
θ	—	10 ⁰ MAX	—	10 ⁰ MAX																																																																			
	CIRCUIT 																																																																						

20CJQ060



Voltage Ratings

Part number	20CJQ060
V_R Max. DC Reverse Voltage (V)	60
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters		20CJQ	Units	Conditions
$I_{F(AV)}$	Max. Average Forward Current See Fig. 5	2.0	A	50% duty cycle @ $T_C = 127^\circ\text{C}$, rectangular waveform
		4.0		50% duty cycle @ $T_C = 109^\circ\text{C}$, rectangular waveform
I_{FSM}	Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg) See Fig. 7	385	A	Following any rated load condition and with rated V_{RWM} applied.
		22		
E_{AS}	Non - Repetitive Avalanche Energy (Per Leg)	10	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 1.0\text{A}$, $L = 20\text{mH}$
I_{AR}	Repetitive Avalanche Current (Per Leg)	1.0	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters		20CJQ	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) See Fig. 1	①	0.59	V	@ 1.0A
		0.75	V	@ 2.0A
		0.56	V	@ 1.0A
		0.67	V	@ 2.0A
I_{RM} Max. Reverse Leakage Current (Per Leg) See Fig. 2	①	0.1	mA	$T_J = 25^\circ\text{C}$
		5.0	mA	$T_J = 125^\circ\text{C}$
C_T Max. Junction Capacitance (Per Leg)		60	pF	$V_R = 5V_{DC}$, (test signal range 100kHz to 1MHz) 25°C
L_S Typical Series Inductance (Per Leg)		6.0	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change (Rated V_R)		10,000	V/ μs	

Thermal-Mechanical Specifications

Parameters		20CJQ	Units	Conditions
T_J	Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
T_{STG}	Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
R_{thJA}	Max. Thermal Resistance, Junction to Ambient	65	$^\circ\text{C}/\text{W}$	DC operation
R_{thJL}	Max. Thermal Resistance, Junction to Lead	25	$^\circ\text{C}/\text{W}$	DC operation — see Fig. 4.
wt	Approximate Weight	0.13(.0045)	g (oz.)	
	Case Style	SOT-223		

① Pulse Width < 300 μs , Duty Cycle < 2%

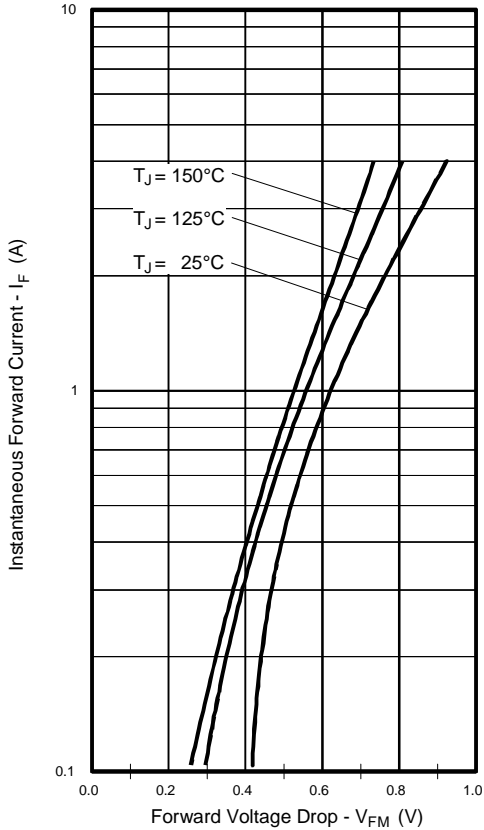


Fig. 1 Max. Forward Voltage Drop Characteristics (Per Leg)

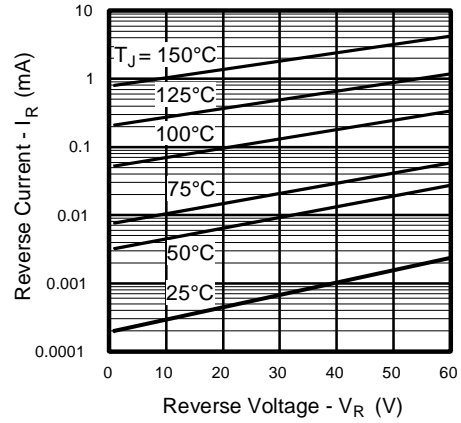


Fig. 2 Typical Values of Reverse Current Vs. Reverse Voltage (Per Leg)

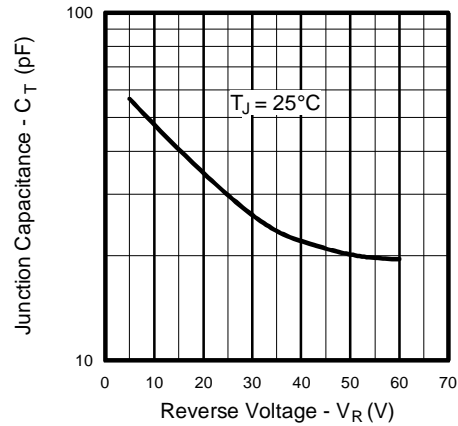


Fig. 3 Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

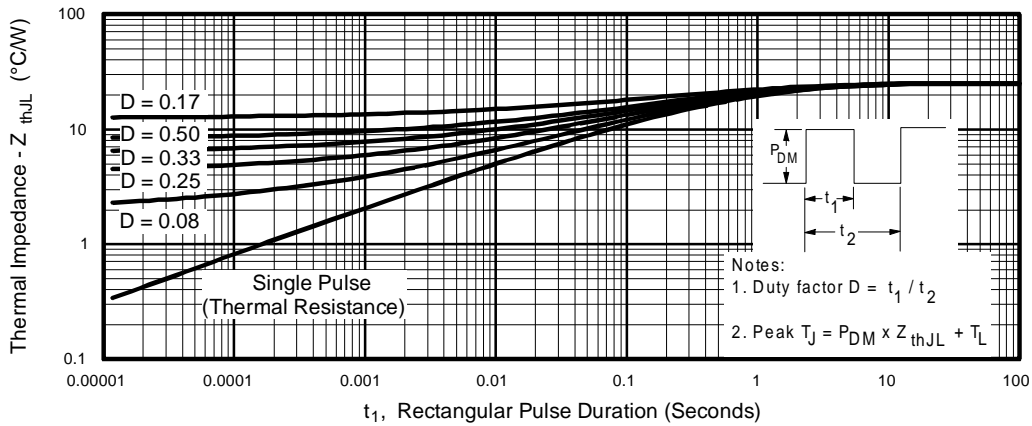


Fig. 4 Max. Thermal Impedance Z_{thJL} Characteristics (Per Leg)

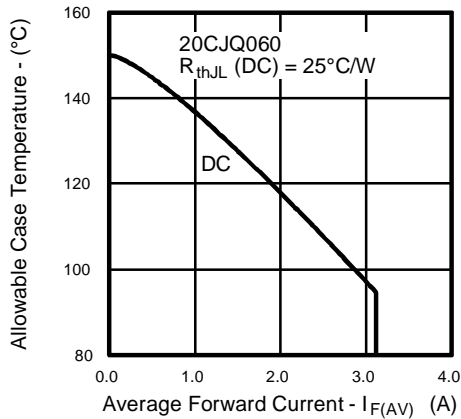


Fig. 5 Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

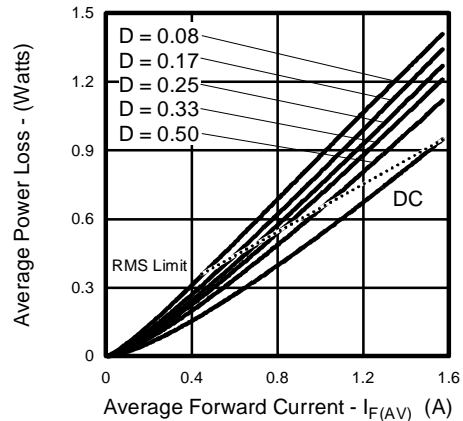


Fig. 6 Forward Power Loss Characteristics (Per Leg)

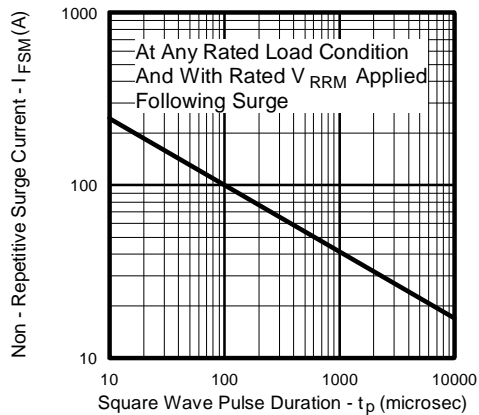


Fig.7 Max. Non-Replicative Surge Current (Per Leg)

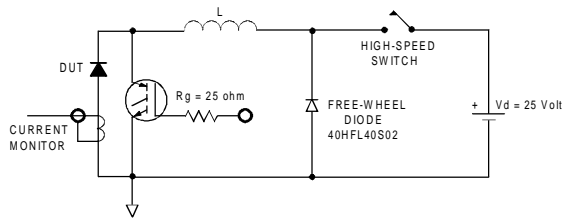


Fig. 8 Unclamped Inductive Test Circuit

Refer to the Appendix Section for the following:

Appendix D: Tape and Reel Information — See page 340.